

HERA IPERSPETTRALE

An ultra-sensitive hyperspectral camera

HERA is an innovative global imaging hyperspectral camera system, providing **exceptional spectral resolution** and **sensitivity**.

It is based on a novel technology that allows one to have an unrivaled light throughput, making it the most suitable device for low-light applications.

Key Features



- High spatial & spectral resolution
- High sensitivity and throughput
- Compact and lightweight
- User friendly software (measurement & data analysis)
- Export data in ENVI format

Applications

- Fluorescence imaging
- Sorting of materials
- Biology
- Agriculture and food quality
- Pharmaceuticals
- Art Conservation
- Forensics

Customer Benefits

- Ease of use: place it on the tripod, point it to the sample and measure
- High performance allows one to have low illumination requirements
- Portable plug and play device

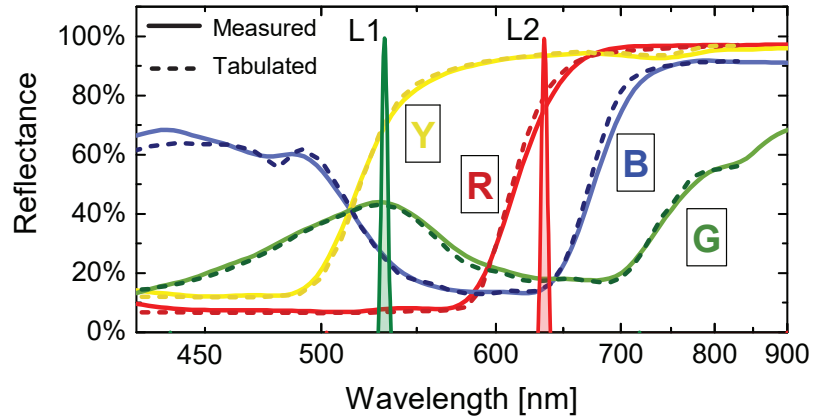

Measurement of spectralon filters. White spectralon was used as a reference. L1 and L2 are laser beams used to present the spectral resolution of HERA.

Technical specifications

Spectral range	400 - 1000 nm
Sensor spatial resolution	1280 x 1024 pixels
User adjustable spectral resolution	<1.5 nm @ 400 nm <10 nm @ 1000 nm
Sensor	CMOS
Number of bits	12 bits
Software interface	Labview based interface
Number of spectral bands	∞^*
Field of view	16 degrees
Working distance	250 mm - ∞
Dimensions	205 x 150 x 83.5 mm
Weight	2 kg

* HERA is FT spectroscopy based instrument and number of spectral bands is software selectable and independent from measurement time

Customization upon request:

HERA can be customized to cover 950-1700 nm spectral region.

HERA can be customized to be compatible with microscope systems